

ISUZU F-SERIES



FTR90M
GVW 14,200 Kgs
Applicable to 19-ft rear body



FVM34T
GVW 26,000 Kgs
Applicable to 25-ft rear body



FRR90M
GVW 10,600 Kgs
Applicable to 20-ft rear body



FVR34Q
GVW 16,000 Kgs
Applicable to 24-ft rear body




FTR90S
GVW 14,200 Kgs
Applicable to 26-ft rear body



FVM34W
GVW 26,000 Kgs
Applicable to 32-ft rear body

POWERED BY:


4HK1 4-Cylinder
Engine

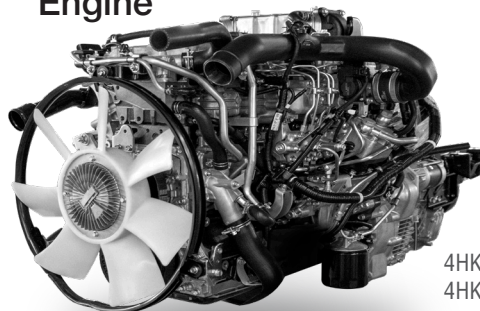

4HK1-TCC (190 PS)
4HK1-TCS (210 PS)

POWERED BY:

6HK1 6-Cylinder
Engine

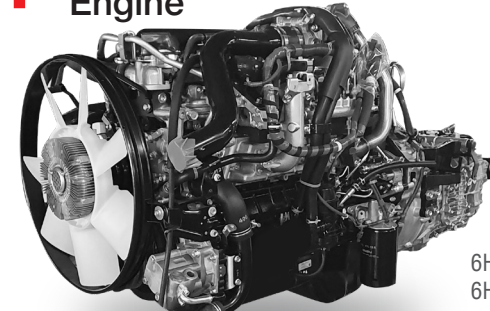


6HK1-TCN (240 PS)
6HK1-TCS (280 PS)

F-SERIES SPECIFICATION						
MODEL	FRR90M	FTR90M	FTR90S	FVR34Q	FVM34T	FVM34W
ENGINE						
Model	4HK1-TCC	4HK1-TCS		6HK1-TCN	6HK1-TCS	
Type	4-Cylinder, Turbo-Intercooler, Common-Rail Direct Injection, Blue Power Diesel Engine			6-Cylinder, In-Line, Common-Rail Direct Injection, Blue Power Diesel Engine		
Bore and Stroke	(mm)	Ø 115 x 125				
Displacement	(cc)	5,193		7,790		
Max. Output KW (PS)/rpm	(ISO Gross)	140 (190) / 2,600	154 (210) / 2,600		177 (240) / 2,400	206 (280) / 2,400
Max. Torque N-m (kg-m)/rpm	(ISO Gross)	510 (52) / 1,600 - 2,600	706 (72) / 1,600		706 (72) / 1,450	882 (90) / 1,450
Fuel Tank Capacity	(Liter)	200				
TRANSMISSION						
Model	MZZ6W	MZW6P			EATON ES1109DD	
Type	6-Speed			9-Speed		
Final Gear Ratio	5.125	6.500	6.143	4.556		
TIRE & WHEEL						
Tire	8.25R16-16PR	11R22.5-16PR				
BRAKE						
Service	Drum Type, Air Over Hydraulic			Drum Type, Full Air		
Auxiliary	Exhaust Brake					
Parking	Center Brake			Wheel Park		
SUSPENSION						
Front	Multi-Leaf Spring with Shock Absorber					
Rear	Multi-Leaf Springs					
ELECTRICAL SYSTEM						
Battery	65D23L x 2					
ACG	24V-50A			24V-60A		
CONVENIENCE						
Cab Window	Power Window					
Cab Door	Auto Door Lock					
Cab Back Glass	Equipped					
Auxiliary Mirrors	Front and Side Under View Mirrors			Front Under View Mirror		
Reverse Warning Buzzer	Equipped					


WEIGHT (Kg.)					
MODEL	RATINGS	CAB AND CHASSIS	FRONT	REAR	GROSS PAYLOAD
	GVW	MASS			
FRR90M	10,600	3,235	2,020	1,215	7,365
FTR90M	14,200	4,380	2,760	1,620	9,820
FTR90S	14,200	4,600	2,950	1,650	9,600
FVR34Q	16,000	5,035	2,935	2,100	10,965
FVM34T	26,000	6,845	3,175	3,670	19,155
FVM34W	26,000	7,005	3,255	3,750	18,995

DIMENSIONS (mm.)											
MODEL	WB	OAL	FOH	ROH	CE	CA	OW	AW	BW	CW	OAH
FRR90M	4,660	7,875	1,170	2,045	6,149	4,104	2,200	1,795	2,165	1,660	2,540
FTR90M	4,650	7,955	1,440	1,865	5,889	4,024	2,400	1,975	2,395	1,790	2,880
FTR90S	6,050	10,000	1,440	2,515	7,939	5,424	2,400	1,975	2,395	1,790	2,880
FVR34Q	5,560	9,350	1,250	2,540	7,289	4,749	2,485	2,055	2,460	1,850	2,940
FVM34T	6,335	9,600	1,250	2,015	7,539	4,839	2,485	2,055	2,460	1,850	2,940
FVM34W	7,195	11,900	1,250	3,455	9,840	5,699	2,485	2,055	2,460	1,850	2,940

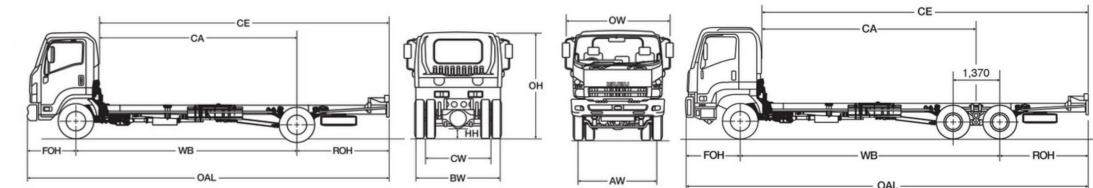


Sturdy Suspension

Strong suspension equipped with multi leaf-spring that can effectively support the weight of the chassis and its cargo.



Reinforced Chassis Frame

Built with a reinforced frame to maximize loading capacity, it can accommodate the rear body you require.



High Rigidity Cab

The highly rigid cab and reinforced side impact beams provide safety to both driver and passenger.



2 years or 50,000 kms warranty coverage, whichever ever comes first.



Easy Egress & Ingress

The built-in step board and steel vertical long grip is designed to provide convenience and safer ingress and egress.



Power Windows & Auto Door Locks

No need to worry about security. Easily secure your vehicle with automated locks and windows.



High Visibility Meter

The F-Series' high visibility instrument cluster gives the driver vehicle status and information at a glance.



SCAN NOW

Dealership:

ISUZU
Your responsible partner

ISUZU PHILIPPINES CORPORATION

114 Technology Ave., Phase II, Laguna Technopark, Biñan, Laguna, 4024
Trunkline (049) 541-0224 to 26 / (632) 7757-6070
Email: customer-relationships@isuzuphil.com

f /isuzuphilippines @isuzuphil isuzuphil www.isuzuphil.com

Printed: June 2022

Isuzu Philippines Corporation reserves the right to change features and specifications without prior notice. Details, descriptions, and illustrations are for informational purposes only and may vary from actual units.